

**Fully automatic, intermittent 2-side sealer
SERVO PACKER 1000 T**



The new one -
graceful film wrapping

Complete product range
for efficient packaging processes

Kalfass 

Results count.


SERVO PACKER 1000 T

The Servo Packer 1000 T is the intermittent version of the Servo Packer and offers sophisticated, proven technology. User-friendliness is guaranteed by the 7" HM-Interface - Easy Touch KP3 - with its easy and intuitive operation. The clever alternative for creating a film bag in an attractive package design.



Technical specifications

	Servo Packer 1000 T
Cross seal bar, length	1150 mm
Seal bar clearance height	150 mm
Power supply	400 volt
Film, flat film	approx. 11 - 100 µm
Transport speed	10 - 35 meter / minute
Packaging capacity, max.	60 cycles / minute

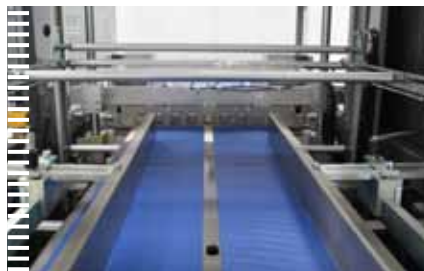

The Servo Packer 1000 T with the intermittent operating principle in customary Kallfass quality

Your benefits highlighted

- Path control: One input of the packing goods parameter in linear dimension for all conveyor belt speeds
- Tight packaging without shrinking
- Attractive package design due to real rectangular film bag
- Very high productivity, flexibility, reliability and availability of the packaging machine
- Fully automatic, intermittent operation
- Maximum flexibility in the packaging process. Use of PE, PO and PLA films

Solutions based on Kallfass quality. Competence in production of a wide range of packaging machines, from customer tailored systems to packaging systems for integration into production lines.