


HORIZONTAL BAGGING MACHINE LOGI WRAP 500 3D



A super-talented film packaging machine

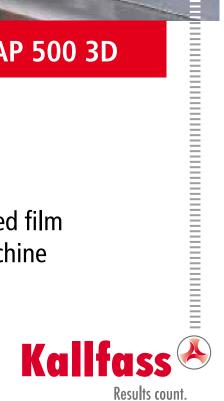

Complete product range for efficient packaging processes

LOGI WRAP 500 3D

This "super talent" uses a measurement grid to identify the product dimensions and adapts the film packaging automatically to fit the product. Thus, tailor-dimensioned film packaging is always ensured. Regardless of wheter shipping or return packaging, display or protective packaging, individual or container packaging, from now on you only need one machine to package your entire product range. The Logi Wrap 500 3D!



Technical specifications	
reennear speemeations	Logi Wrap 500 3D
Dimensions: length x width x height	1800 x 1100 x 2100
Transverse seal bar, length	550 (600)
Seal bar clearance height	up to 200 mm
Product length, min.	120 mm
Packaging capacity, max.	2000 cycles / hour
Film, flat film	up to 600 mm
Label printing / data connection	optional



The measurement grid identifies the product dimensions for each customized packaging

Your benefits highlighted

- Film bag with stable, durable side seals, completely sealed on all four sides
- Very small footprint. Easy to integrate into the product flow of any supply chain with a minimum of space requirements, or also to be used as a stand-alone solution
- After packing cycle, the product is discharged from the machine
- Packs reliably varying product dimensions in random order
- Capacity speed of up to 2000 cycles per hour
- All usual trade films, such as polyolefin, polyethylene, poly lactide acid (PLA), unprinted, printed, transparent or coloured (opaque) can be easily processed
- Easy integration of label printers and data connection

Solutions based on Kallfass quality. Competence in production of a wide range of packaging machines, from customer taylored systems to packaging systems for integration into production lines.



KALLFASS is certificated according to ISO 9001:2008 www.kallfass.com Kallfass Verpackungsmaschinen GmbH Siemensstraße 8 · 72622 Nürtingen · Germany Phone +49 7022 607-0 · Fax -200 · info@kallfass.com

