

Fully automatic, intermittent 2-side sealer  
**SERVO PACKER 500 T**



The new one -  
graceful film wrapping

Complete product range  
for efficient packaging processes

**Kalfass** 

Results count.


## SERVO PACKER 500 T

The Servo Packer 500 T is the intermittent version of the Servo Packer and offers sophisticated, proven technology. User-friendliness is guaranteed by the 7" HM-Interface - Easy Touch KP3 - with its easy and intuitive operation. The clever alternative for creating a film bag in an attractive package design.



### Technical specifications

	Servo Packer 500 T
Cross seal bar, length	550 mm
Seal bar clearance height	150 mm
Power supply	400 volt
Film, flat film	approx. 11 - 100 µm
Transport speed	10 - 35 meter / minute
Packaging capacity, max.	85 cycles / minute

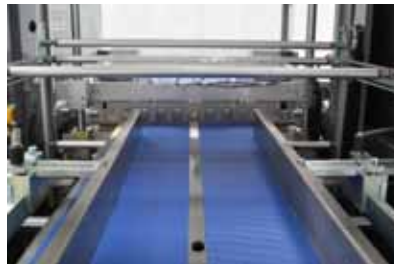

The Servo Packer 500 T with the intermittent operating principle in customary Kallfass quality

### Your benefits highlighted

- Path control: One input of the packing goods parameter in linear dimension for all conveyor belt speeds
- Tight packaging without shrinking
- Attractive package design due to real rectangular film bag
- Very high productivity, flexibility, reliability and availability of the packaging machine
- Fully automatic, intermittent operation
- Maximum flexibility in the packaging process. Use of PE, PO and PLA films

**Solutions based on Kallfass quality.** Competence in production of a wide range of packaging machines, from customer tailored systems to packaging systems for integration into production lines.



KALLFASS is certificated according to ISO 9001:2008  
[www.kallfass.com](http://www.kallfass.com)

**Kallfass Verpackungsmaschinen GmbH**  
Siemensstraße 8 · 72622 Nürtingen · Germany  
Phone +49 7022 607-0 · Fax -200 · [info@kallfass.com](mailto:info@kallfass.com)

**Kallfass**   
Results count.